

STORMCEPTOR® OSR

The Stormceptor OSR is optimized to remove oil and sediment from stormwater runoff. Recommended applications include pretreatment and redevelopment/retrofit projects to meet your water quality objectives.

Product Overview

- Patented design is optimized for fine sand-sized particle removal and increased hydraulic capacity
- Typically designed for removal of 50 micron particles and greater
- Easily and flexibly sized to meet your site's needs
- Hydrocarbon spill protection in wet and dry weather conditions

Proven performance

- Independent Third-party tested
- Independent verification by New Jersey Corporation of Advanced Technology (NJCAT)

Flexible and versatile

- Easy installation – small footprint saves time and money with limited site disruption
- Minimal drop between inlet and outlet; 1-inch (25mm) or 3-inch (75mm)
- Can be used as a bend structure
- Low head loss from inlet to outlet makes it a compatible with existing infrastructure
- Ideal for new projects, redevelopment and retrofit applications

Essential part of a stormwater treatment train

- Seamless support of existing BMPs (wet/dry ponds, filtration and infiltration devices)
- Improves water quality, extends BMP maintenance life and minimizes costs


Maintenance made easy

- Maintenance is convenient and trouble-free, with virtually no site disruption
- Easy unit entrance from surface access cover – no confined space entry needed



With over 40,000 units operating worldwide, Stormceptor performs and protects every day, in every storm.

Oil & Sediment Removal

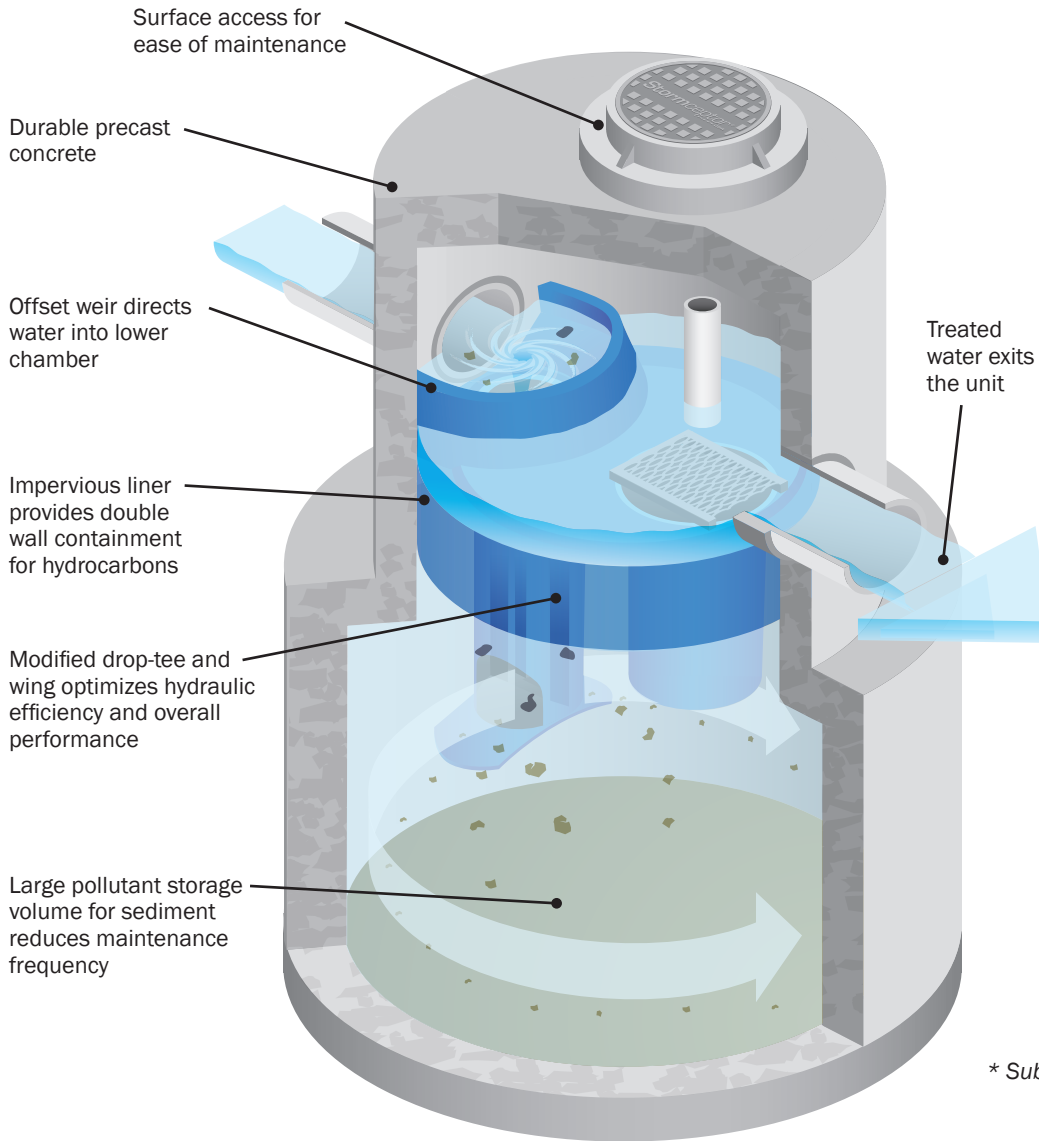

| Stormceptor OSR Models | |
|------------------------|------|
| Model | US |
| Inlet OSR | 065 |
| In-line OSR | 140 |
| | 250 |
| | 390 |
| | 560 |
| Series OSR | 780 |
| | 1125 |


* Submerged conditions can be accommodated

** Fiberglass units are available




Easy to install

Small footprint saves time and money with limited disruption to your site.



Seamless

Minimal drop between inlet and outlet pipes makes Stormceptor ideal for retrofits and new development projects.



Flexible

Inlet OSR can connect multiple inlet pipes.
Can be used as a bend structure.