


**Reinforced Concrete Pipe  
 Tongue & Groove Joint  
 12" - 96" Diameter**

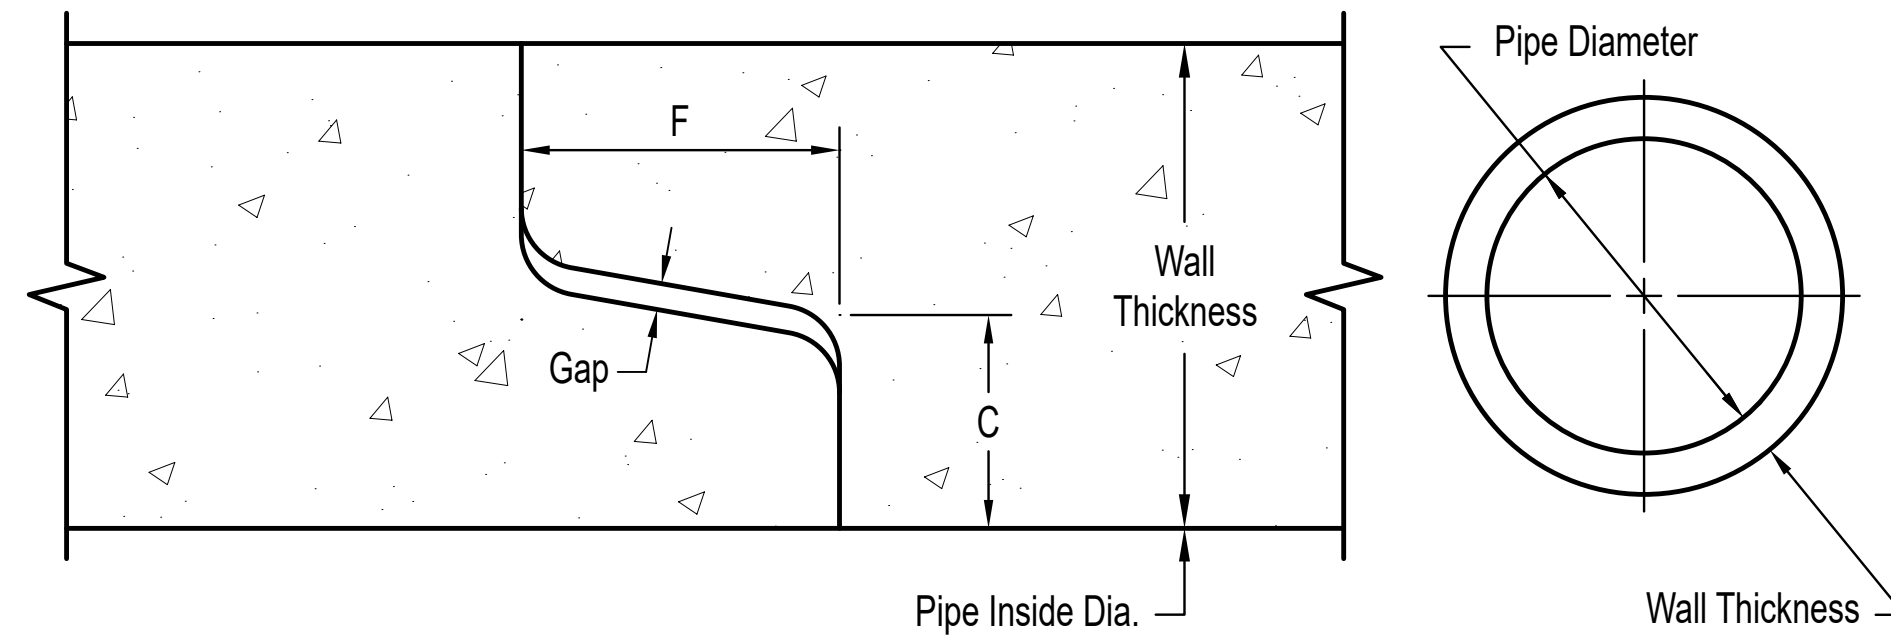

Section Thru Joint

Section Thru Barrel

Table of Dimensions and Weights						
Pipe Inside Diameter (Inches)	Wall Thickness (Inches)	C (Inches)	F (Inches)	Gap (Inches)	Length (Feet)	Weight (Lbs./Ft.)
12	2	7/8	2	1/4	6	92
15	2 1/4	1 1/16	2	1/4	6, 8	127
18	2 1/2	1 3/16	2	1/4	6, 8	168
21	2 3/4	1 1/4	2 1/4	1/4	6, 8	214
24	3	1 5/16	2 1/2	1/4	6, 8	265
30	3 1/2	1 1/2	2 3/4	9/32	6, 8	384
36	4	1 13/16	3	9/32	6, 8	524
42	4 1/2	1 7/8	3 1/4	3/8	6, 8	685
48	5	2	3 3/4	3/8	6, 8	867
54	5 1/2	2 1/4	4	3/8	6, 8	1071
60	6	2 1/2	4 1/4	1/2	6, 8	1296
66	6 1/2	2 3/4	4 1/2	1/2	6, 8	1542
72	7	3	4 1/2	1/2	6, 8	1810
78	7 1/2	3 1/4	4 1/2	1/2	6, 8	2098
84	8	3 1/2	4 1/2	1/2	6, 8	2410
90	8 1/2	3 3/8	5 1/2	1/2	6, 8	2740
96	9	3 5/8	5 1/2	1/2	6, 8	3095

Pipe dimensions may vary depending on equipment availability.

Notes:

1. Pipe manufactured to meet current ASTM specifications.
2. Contact a Concrete Pipe Division representative for details not listed on this sheet.